



Heading and Relative Positioning Solution

Benefits and Features

Precise heading and pitch

Accurate relative positioning

GPS+GLONASS satellite availability

Easy to use plug and play installation

Easy creation of ALIGN network

NovAtel's ALIGN technology combines two or more receivers to generate precise positioning and heading for dynamic applications. ALIGN uses GPS, GLONASS and SBAS to provide the best solution accuracy and availability for your application even in harsh environments. You get the accuracy you need from synchronized solutions with output rates up to 20 Hz.

ALIGN is available in two models:

ALIGN Heading[™]: Generates high precision heading and pitch angles between two receivers for real-time navigation.

ALIGN Accuracy

	0.5m Baseline	1m Baseline	2m Baseline
Single Frequency - Fixed Heading Accuracy	0.60 degrees	0.30 degrees	0.15 degrees
Dual Frequency - Fixed Heading Accuracy	0.40 degrees	0.20 degrees	0.10 degrees

ALIGN Relative Positioning[™]: Generates high accuracy heading, pitch, relative separation and positioning between two or more receivers for high-precision monitoring and automation.

Plug-and-play functionality can quickly and easily create an ALIGN system that communicates through a wireless or cable link. You can also create a network of multiple ALIGN receivers that all have spatial awareness of each other.¹

ALIGN is offered on NovAtel OEMV[®] and OEM6[™] receiver platforms.

If you require more information about Firmware, visit novatel.com/products/firmware-options

novatel.com

sales@novatel.com

1-800-NOVATEL (U.S. and Canada)

or 403-295-4900

China 0086-21-54452990-8011

Europe 44-1993-848-736

SE Asia and Australia 61-400-833-601



¹Please refer to the ALIGN Application note for more use cases (<http://www.novatel.com/assets/documents/bulletins/apn048.pdf>)

ALIGN Use Cases:

Heading Use Case: Fixed Antenna Distance between Master and Rover Receivers on One Platform

Figure 1:

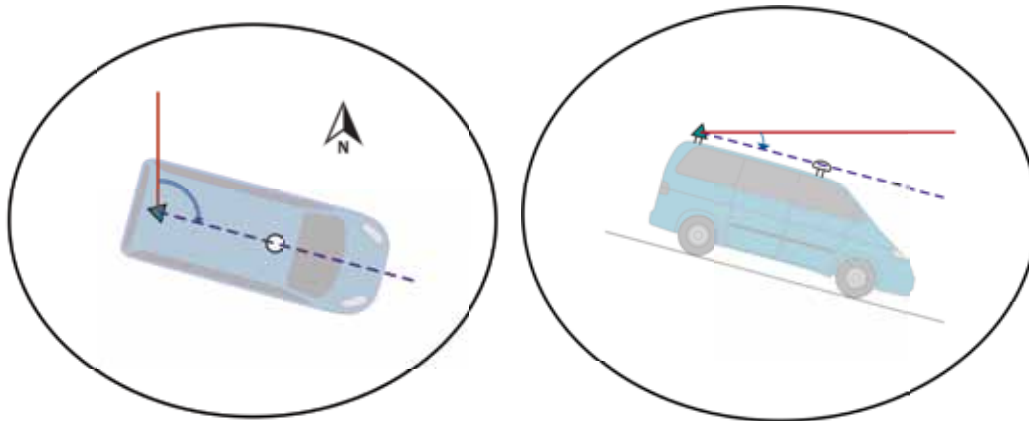


Figure 1 illustrates Master and Rover receivers located on the same vehicle and two antennas installed at a fixed distance from one another. Relative heading and pitch are computed with respect to the Master receiver.

Relative Positioning Use Case: Master and Rover Receivers on Separate Moving Platforms

Figure 2:

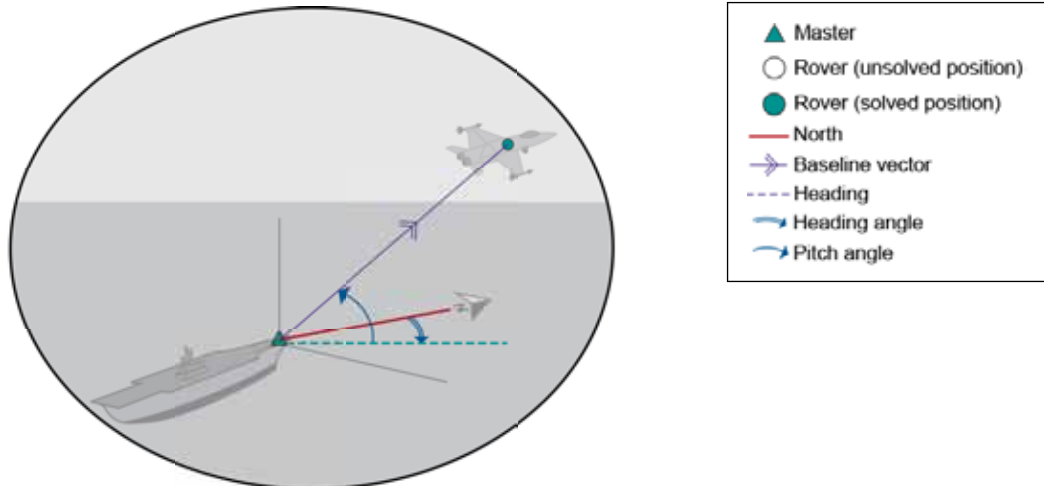


Figure 2 illustrates the Master receiver located on a marine vessel and the Rover receiver located on a fighter jet. Relative heading, pitch, baseline length and Rover positions are computed with respect to the Master receiver.

If you require more information about our antennas,
visit novatel.com/products/gnss-antennas



novatel.com

sales@novatel.com

1-800-NOVATEL (U.S. and Canada)

or 403-295-4900

China 0086-21-54452990-8011

Europe 44-1993-848-736

SE Asia and Australia 61-400-833-601

Version 2 D13883-Specifications subject to change without notice.

© 2011 NovAtel Inc. All rights reserved.

NovAtel, OEMV and ALIGN are registered trademarks of NovAtel Inc.
OEM6 is a trademarks of NovAtel Inc.

Printed in Canada.

July 2011

For the most recent details of this product visit novatel.com/products/firmware-options

